



VELA S Series

moovilum
light in motion

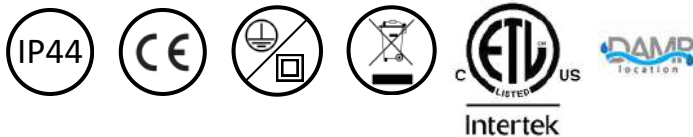


DIMENSIONS

Cut-out:
4"Ø100-118



Size (mm):
W128 x L 128 x H26



FEATURES


Voltage	120 VAC
Frequency range	50 - 60 Hz
Wattage	12W
Lumen Flux	1350LM
Efficacy	90 lm/W
CRI	80
Warranty	5 years
Mounting	Recessed

CONFIGURATOR

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCS.	CLASS	RAL COLOR
VLS Serie 1	12W	12D 120°	5CCT 30/40/50K	8 80	12 RE 120 VAC Dimmable TRIAC	N/A	1 Class I	W White RAL 9016
						EB Emergency Battery		B Black RAL 9005
								S Silver RAL 9006

VELA R Series


moovilum
light in motion

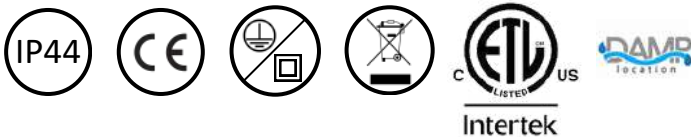

DIMENSIONS


Cut Out (mm)

4"Ø100-125



Size(mm)

D136xH26



FEATURES

Voltage	120 VAC
Frequency range	50 - 60 Hz
Wattage	12W
Lumen Flux	1350LM
Efficacy	90 lm/W
CRI	80
Warranty	5 years
Mounting	Recessed

CONFIGURATOR

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCS.	CLASS	RAL COLOR
VLR Serie 1	12W	12D 120°	5CCT 30/40/50K	8 80	12 RE 120 VAC Dimmable TRIAC	N/A	1 Class I	W White RAL 9016
						EB Emergency Battery		B Black RAL 9005
								S Silver RAL 9006