




LOTUS 2 Series



Optical Accessories



DIMENSIONS

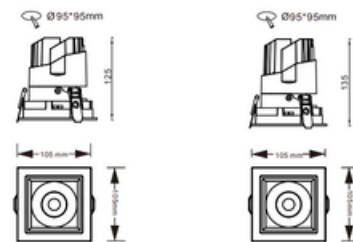

FEATURES

Voltage	120 VAC
Frequency range	50 - 60 Hz
Wattage	8W
Lumen Flux	700 LM
Efficacy	85 lm/W
CRI	90
Warranty	5 years
Mounting	Recessed



CONFIGURATOR

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
LT2 S Square	8W	15°	27K 2700K	9 90	12RE 120 VAC, Dimmable TRIAC	N/A	WW White & White
		24°	30K 3000K		27RE 100-277 VAC, Dimmable 0-10V		WB White & Black
		36°	35K 3500K				BB Black & Black
		55°	40K 4000K				BW Black & White
			50K 5000K				

LOTUS 2 Series



Optical Accessories




FEATURES

Voltage	120 VAC
Dimming	TRIAC / Dimmable 0-10V
Wattage	8W
Lumen Flux	700 LM
Efficacy	85lm/W
CRI	90
Warranty	5 years
Mounting	Recessed


CONFIGURATOR

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
LT2 R Round	8W	15°	27K 2700K	9 90	12RE 120 VAC, Dimmable TRIAC	N/A	WW White & White
		24°	30K 3000K		12REE 120 VAC, Dimmable TRIAC (ELV) (5%-100%)		WB White & Black
		36°	35K 3500K		27RE 100-277 VAC, Dimmable 0-10V	EB Emergency Battery	BB Black & Black
		55°	40K 4000K				BW Black & White
			50K 5000K				


LOTUS 2 Series



Optical Accessories



DIMENSIONS

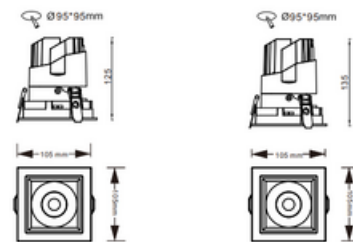

FEATURES

Voltage	120 VAC
Dimming	TRIAC / Dimmable 0-10V
Wattage	8W
Lumen Flux	700 LM
Efficacy	85 lm/W
CRI	90
Warranty	5 years
Mounting	Recessed

CONFIGURATOR

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
LT2 S Square	8W	15°	27K 2700K	9 90	12RE 120 VAC, Dimmable TRIAC	N/A	WW White & White
		24°	30K 3000K		27RE 100-277 VAC, Dimmable 0-10V		WB White & Black
		36°	35K 3500K				BB Black & Black
		55°	40K 4000K				BW Black & White
			50K 5000K				

LOTUS 2 Series



Optical Accessories



Honeycomb



Stretching filter





Fabric lens



Soft light filter

DIMENSIONS



FEATURES

Voltage	120 VAC
Dimming	TRIAC / Dimmable 0-10V
Wattage	8W
Lumen Flux	700 LM
Efficacy	85 lm/W
CRI	90
Warranty	5 years
Mounting	Recessed


CONFIGURATOR

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
LT2 S Square	8W	15°	27K 2700K	9 90	12RE 120 VAC, Dimmable TRIAC	N/A	WW White & White
		24°	30K 3000K		27RE 100-277 VAC, Dimmable 0-10V		WB White & Black
		36°	35K 3500K				BB Black & Black
		55°	40K 4000K				BW Black & White
			50K 5000K				

LOTUS 3 Series



DIMENSIONS



Honeycomb



Stretching filter



Fabric lens



Soft light filter


FEATURES

Voltage	120 VAC
Dimming	TRIAC / TRIAC (ELV) / 0-10 V
Wattage	10W
Lumen Flux	850 LM
Efficacy	85lm/W
CRI	90
Warranty	5 years
Mounting	Recessed


CONFIGURATOR

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
LT3 R Round 2 inches	10W	15°	27K 2700K	9 90	12RE 120 VAC, Dimmable TRIAC	N/A	WW White & White
	12W	24°	30K 3000K		12REE 120 VAC, Dimmable TRIAC (ELV) (5%-100%)	EB Emergency Battery	WB White & Black
		36°	35K 3500K		27RE 100-277 VAC, Dimmable 0-10V		BB Black & Black
		55°	40K 4000K				BW Black & White
			DTW (3000K-1800K)				


LOTUS 4 Series



Optical Accessories



DIMENSIONS

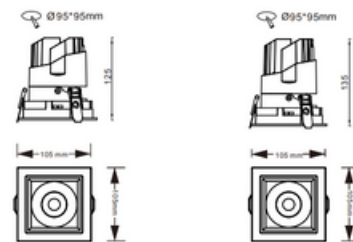

FEATURES

Voltage	120 VAC
Dimming	TRIAC / Dimmable 0-10V
Wattage	18W
Lumen Flux	1530LM
Efficacy	85 lm/W
CRI	90
Warranty	5 years
Mounting	Recessed

CONFIGURATOR

MODEL	POWER	OPTIC	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
LT4 S Square	18W	15°	27K 2700K	9 90	12RE 120 VAC, Dimmable TRIAC	N/A	WW White & White
		24°	30K 3000K		27RE 100-277 VAC, Dimmable 0-10V		WB White & Black
		36°	35K 3500K				BB Black & Black
		55°	40K 4000K				BW Black & White
			50K 5000K				