


META Series



FEATURES

Voltage Range	110 - 277 VAC
Frequency Range	50 ~ 60 Hz
Dimming	Dimmable 1 - 10 V.
Efficiency	1200 lm/ft
Lifetime	>50 000 h
Operating Temperature	-20 C° ~ 40 C°
Installation	Pendant

DIMENSIONS

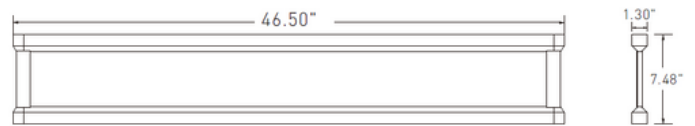

CONFIGURATIONS

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
MTAV 4ft	45W	Diffuser	30K 3000K	8 80	27PR 110 - 277VAC Dimmable. 0-10 V.	Canopy Square 1.6"	S Silver
		Louver	35K 3500K			Canopy Round - 1.6"	
			40K 4000K			ED Emergency Driver	

REFERENCES

References	4000K	
	Lumens	lm/ft
MTAV-45WD-40K8-27PR_S	>54000	>1200