



MOV 0606 Series

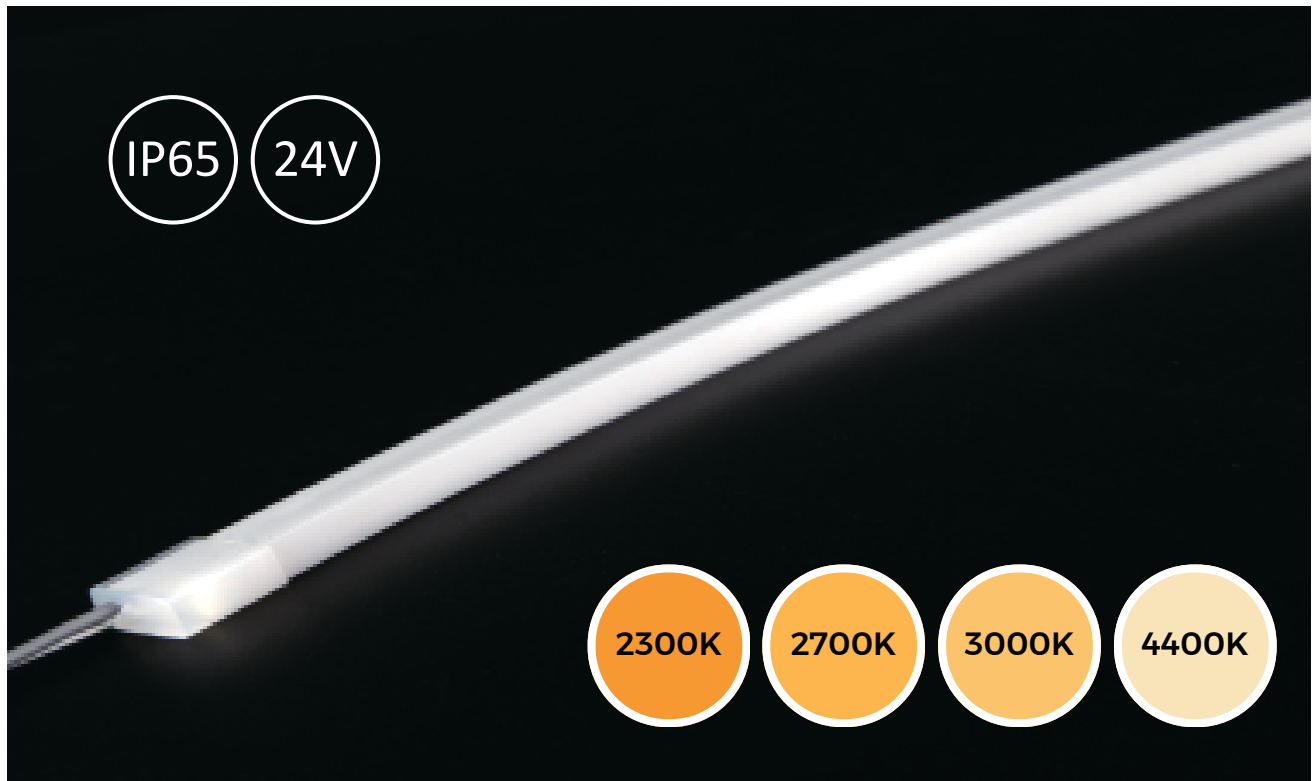

FEATURES

Light Source	High luminous efficiency, LM80 proved
Process & Material	High light transmittance, environmental silicone material, IP65
Optical Design	Unique optical light distribution structure design, uniform lighting surface and no shadow.
Appearance Design	Compared with the traditional neon tube or PVC guardrail tube, the silicone material has good flexibility, the simple and stylish appearance, which is exquisite and unique.
Environmental Features	Resistance to saline solutions, acids & alkali, corrosive gases and UV.
Working / Storage Temperature	Ta: -25~55°C / 0°C~60°C
Application	Furniture supporting lighting, Outdoor/indoor lighting, Indoor general lighting
Warranty	Indoor: 5 years warranty or working life = 60000 Hours ,whichever comes first Outdoor: 3 years warranty or working life = 36000 Hours ,whichever comes first.


DIMENSIONS

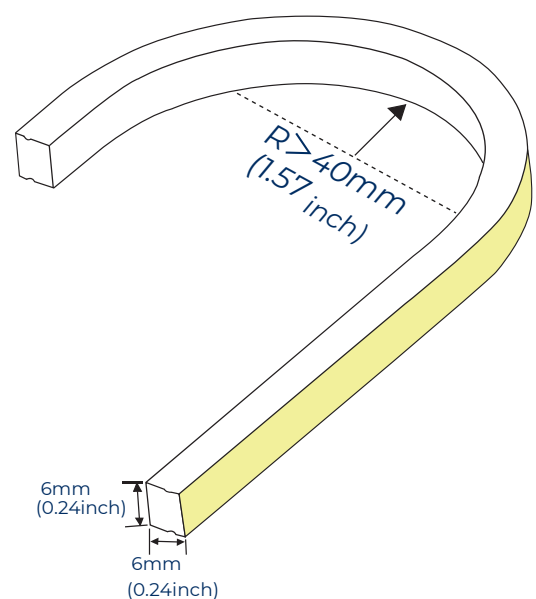

BASIC PARAMETERS


MODEL	CCT	CRI	INPUT VOLTAGE (V)	RATED CURRENT (A/m)	RATED POWER (W/m)	MAX POWER (W/m)	LUMENS (LM/m)	LENGHT	REMARK
NTT0606-9XX24CSN050CCXXXX	2300K	> 90	24	0.3 (0.09A/ft)	7.2 (2.19W/ft)	8.3 (2.53W/ft)	350 (107LM/ft)	5000mm (16.4ft)	7LED/25mm
	2700K						400 (122LM/ft)		
	3000K						400 (122LM/ft)		
	4400K						440 (134LM/ft)		

LIGHT DISTRIBUTION

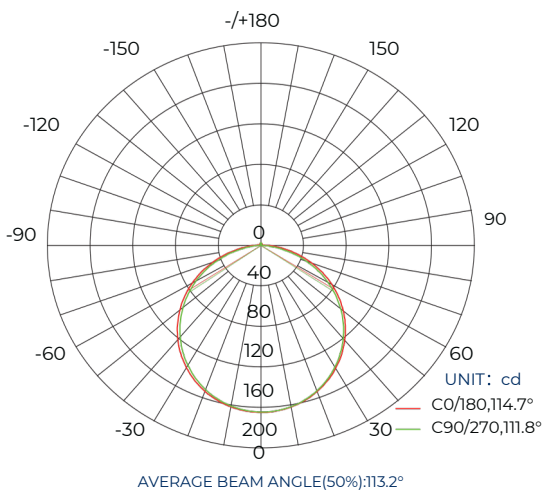

Note: The above data is based on 24V monochrome 4000K color temperature. If you need other models of IES files, please download the corresponding models from the IES database.

Flux out: 341.5 lm

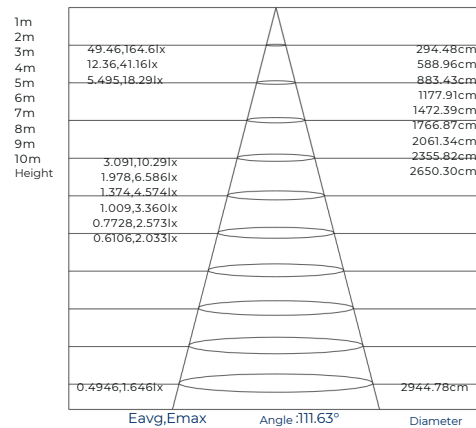


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.







Effective average illuminance

PRODUCT MECHANICAL PARAMETER

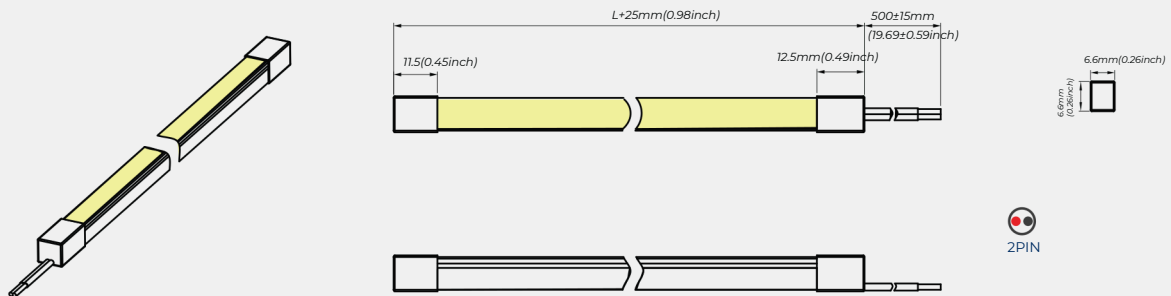

·IP65 Glued cap-top outlet



ACCESSORY INFORMATION

NAME	DESCRIPTION	IMAGE	SECTIONAL SIZE	ORDERING CODE	QUANTITY (PCS)	NET WEIGHT (KG)	BOX - WEIGHT (KG)	GROSS WEIGHT (KG)
Aluminium Carrier	Flat Mounting Slot			AS-NTT0606A-1000	280	0.052	14.56	15.56
Aluminium Clip	Flat Mounting Clip			AS-NTT0606S-18	800	0.0011	0.88	1.03
End Cap Set	End Cap Set, Including End Cap And Plug			AS-NTT0606GH0-EC	800	0.0009	0.72	1.02
Glue	588G Acidic Glue		-	AS-PG-0002	150	0.014	2.1	2.4
Wire	2P PVC Wire(0.5m)		-	AS-WS-0019	200	0.0077	1.54	1.84
	2P PVC Wire(2m)			AS-WS-0020	100	0.031	3.1	3.4
Connector	2PIN IP68 Waterproof Connector		-	AS-FC-0001	512	0.016	8.192	9.5

ACCESSORY INFORMATION

PRODUCT IMAGE	PRODUCT NAME	PRODUCT NUMBER	ORDER CODE	PRODUCT SPECIFICATIONS	APPLICABLE PRODUCTS
	Monochrome Remote	CK1-GBA	402-02-000000-00001	Output Signal: RF(2.4GHz) Working Voltage: 3VDC(CR2032) Remote Control Distance: 30m Working Temperature: Ta:0-30 °C~0+55 °C	Monochrome Light Strip Use with CK1-GBA
	Monotone Light Controller	CR1-GBA	402-01-000000-00001	Input Voltage: 12-48VDC Output Current: 15A@12/24V-10A@36/48V Output Power: 180W@12V-360W@24V 360W@36V-480W@48V Working Temperature: Ta:0-30 °C~0+55 °C	Monochrome Light Strip Use with CK1-GBA